




I99L59N0
AirDeluxe 300
Worktop ventilation
90 cm wide

- Downdraft for installation in worktops
- Extension height 406 mm
- Appliance colour: stainless steel
- Suitable for ducted or re-circulated extraction
- For recirculated extraction charcoal filter (accessory) needed
- Electronic controls
- TouchControl (3-stage + 2 intensive) mit 7-segment display
- Automatic revert setting, 5 or 10 minutes
- Automatic 15 min after running
- Interval operation
- Twin channel high performance fan motor
- Lighting via 1 x 10 W LED-module
- Light dimmer function
- Softlight
- Rimm ventilation
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 510 m³/h
Intensive 750 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 63 dB(A) re 1 pW (49 dB(A) re 20 µPa sound pressure)
Intensive: 71 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
- Power rating: 285 W
- Dimensions recirculating (HxWxD): 652 - 1052 x 880 x 352 mm
- Dimensions exhaust air (HxWxD): 652 - 1052 x 880 x 352 mm


Included accessories



Optional accessories

- Z5159X1 Active carbon filter

Alternative colors available



Technical Data

Characteristics

Typology : Traditional
Approval certificates : CE, VDE
Length electrical supply cord (cm) : 150.0
Required niche size for installation (HxWxD) : 652mm x 880mm x 113mm
Height of product, without chimney (mm) : 652
Dimensions of the product, with chimney (if exists) (mm) : 652 - 1052 x 880 x 352
Net weight (kg) : 40.000
Type of control : electronical
Maximum output air extraction (m³/h) : 580
Boost position output recirculating (m³/h) : 700
Maximum output recirculating air (m³/h) : 540
Boost position air extraction (m³/h) : 750
Number of lights : 1
Diameter of air outlet (mm) : 150
Grease filter material : aluminium
Odour filter : No
Operating Mode : Convertible
Delay Shut off modes : 15M
Required accessories : Blower
Optional accessories : Z5159X1
Type of lamps used : LED
Total power of the lamps (W) : 10
Grease filter type : Kassette
Clean filter reminders : Electronic

Consumption and connection features

Connection Rating (W) : 285
Current (A) : 10
Voltage (V) : 230
Frequency (Hz) : 50
Plug type : Gardy plug w/ earthing
Installation typology : Half-integrated
Material body : Stainless steel
Approval certificates : CE, VDE
Plug type : Gardy plug w/ earthing
Dimensions of the packed product (in) : 30.51 x 39.96 x 23.62
Net weight (lbs) : 88
Gross weight (lbs) : 90
Discharge direction : downward
No-return airflow flap : No

Neff
I99L59N0
Telescopic Table Ventilation 90cm


Predecessor:

Successor:

EAN code:
4242004169277

sales programme:

I99L59N0
AirDeluxe 300
 Worktop ventilation
 90 cm wide

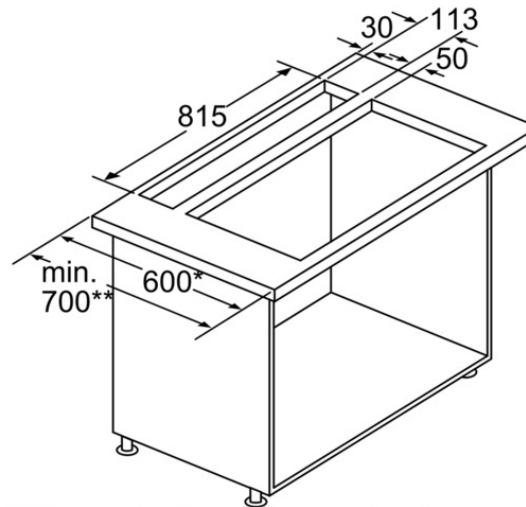

- * 600 mm depth only in combination with slim hobs.
 ** min. 700 mm for hobs with 500 mm cut-out depth.
- measurements in mm

